



- Unbox luminaire(s) and place on soft surface, along with relevant accessories.
- A** TriPlane Linear SQ Luminaire
 - B** Power Supply Cord
 - C** Daisy-Chain Power Connector Cord
 - D** 0-10V Control Supply Cord
 - E** Daisy-chain 0-10V Dimming Connector Cord
 - F** Mounting Brackets (x2)

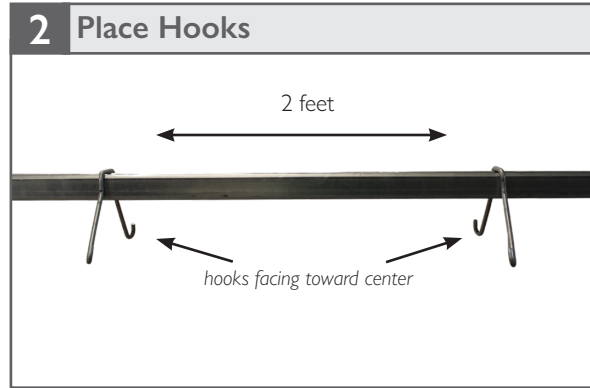


- With hooks facing towards the centre of the luminaire, place both mounting brackets over the top of the track/truss in specified mounting location.
- Brackets to be spaced approx. 2 ft. apart.

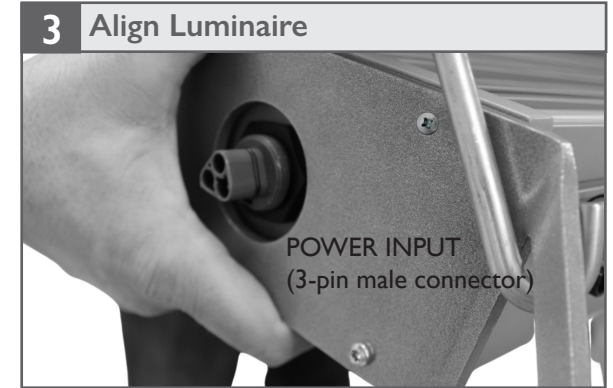


- Supporting luminaire from below, on either end of the electronics compartment, orient so that the end with the power input connector is aligned with power supply.

NOTE: Never lift luminaire by the LED modules.


Always turn off and lock out the branch circuit before commencing installation or maintenance work.

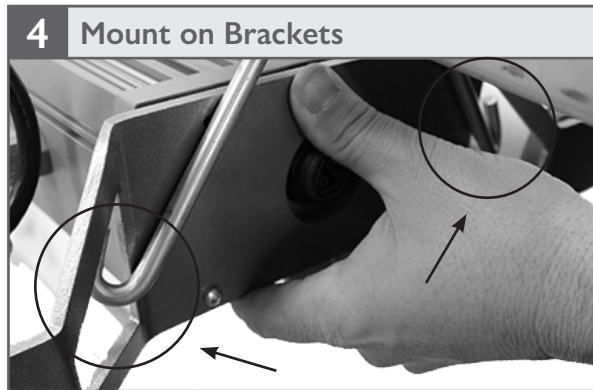

- Still supporting the luminaire on either end of the electronics compartment, align the open hooks of one mounting bracket with the corresponding window cut-outs in the luminaire end plate. Slowly lower that end of luminaire until hooks are fully engaged in windows.
- Repeat on other side. Continue to support luminaire from below until both brackets are fully engaged and luminaire is securely mounted.

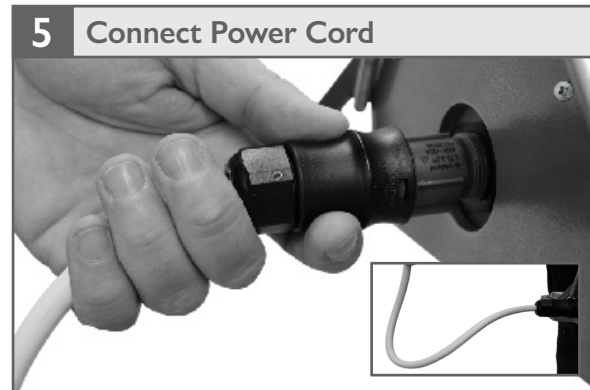


- Connect the whip end of the power cord to branch circuit. Align 3-pin female connector on power cord and push into luminaire connector until firmly engaged
- NOTE: Coil and secure excess cable - allowing for drip loops to draw moisture away from connectors*

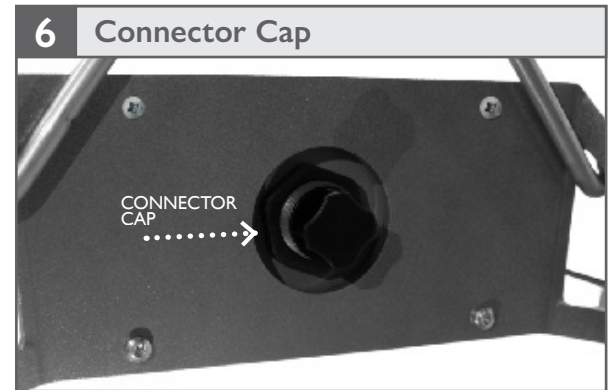

- Ensure that factory-installed connector cap remains firmly engaged in 3-pin female connector at opposite (power out) end of luminaire to ensure safe operation and IP integrity.
- Cap should ONLY be removed if luminaire is connected to another for daisy chaining.

NOTE: Both connectors on the luminaire must be sealed (either with a power cord, daisy-chain connector cord or a cap) once installed. Use of luminaire(s) with exposed connectors will void the product warranty.


ATTENTION: Luminaires should only be installed by qualified individuals, and in accordance with national and local building and electrical codes.

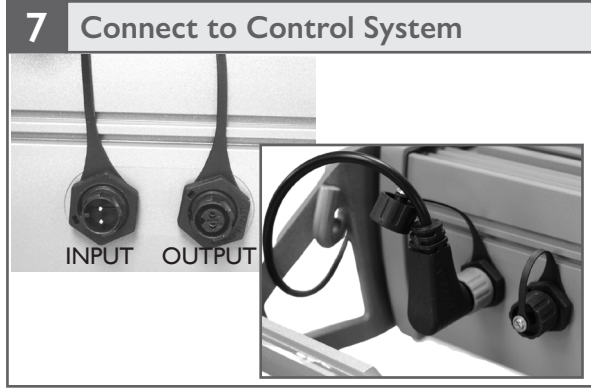

- If connecting luminaire(s) to a control system, remove connector cap from 0-10V input connector on luminaire.
- Push and click open end of right-angle female connector on 0-10V control supply cord into male control input connector on luminaire and twist to lock.



- Feed whip end of 10V control supply cord through luminaire end plate window to create drip loop.
 - Connect whip end to control system.
- NOTE: Both 0-10V connectors on the luminaire must remain capped when not in use to ensure safe operation and IP integrity. Use of luminaire(s) with exposed connectors will void the product warranty.*

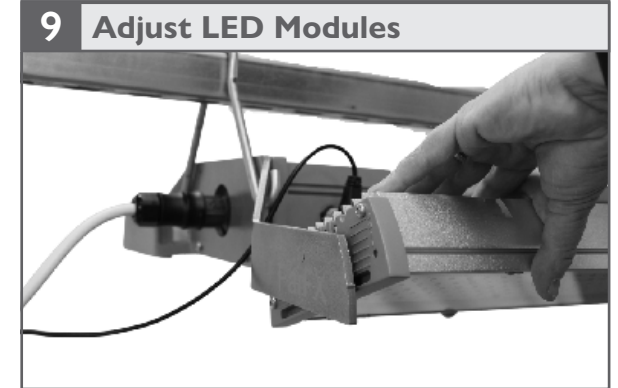


- LED modules can be individually adjusted in increments of 5 degrees by applying gentle pressure on the side(s).
 - The angle of the LED modules should be set in accordance with your light plan.
- NOTE: Always wear clean cotton gloves when adjusting the LED modules to avoid fingerprints and/or debris on the glass lens.*


2 **ATTENTION:** Luminaires should only be installed by qualified individuals, and in accordance with national and local building and electrical codes. **2**



If you are daisy-chaining your luminaires, follow steps 1-9 above, then proceed as follows:

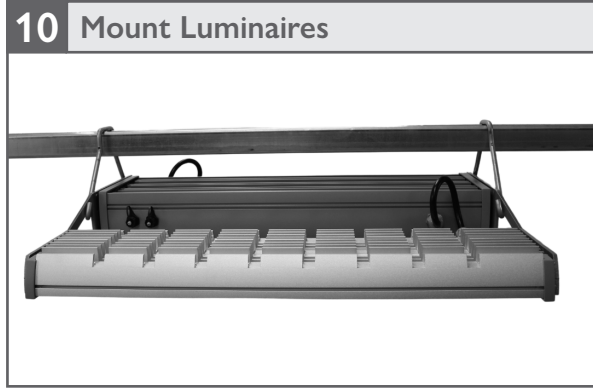


- Mount remaining luminaire(s) in daisy-chain string in accordance with light plan.

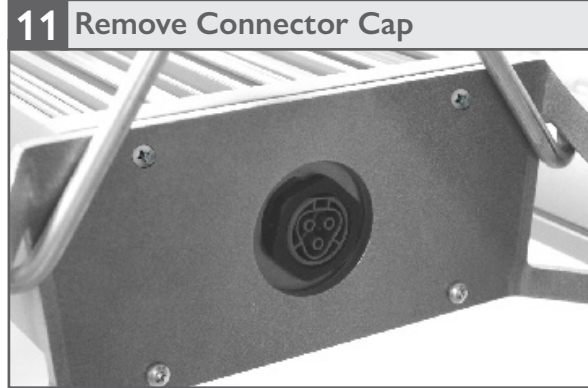


- Remove preinstalled connector cap in 3-pin connectors on "power out" side of luminaire(s) between adjacent modules in daisy-chain string.


TIP: Store removed connector caps in safe place as they will need to be re-installed if daisy-chain connector is ever removed.

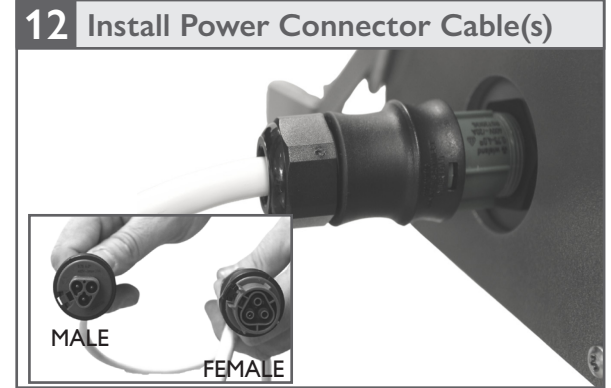


- Securely connect the modules with daisy-chain power connector cables (available in lengths of 3 ft / 6ft / 10 ft / 15ft). Daisy-chain connector cables have a 3-pin female connector on one end, and a 3-pin male connector on the other end.
- The 3-pin male connector on the cord must be installed into the corresponding 3-pin female "power out" connector on the luminaire. The 3-pin female connector must be installed into the corresponding 3-pin male "power in" connector on the next luminaire in the string.

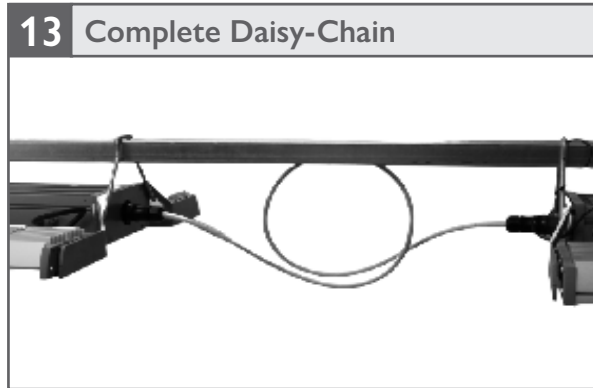

- Continue until daisy-chain is complete.
- Ensure that connector cap remains firmly installed in last luminaire of daisy-chain string to ensure safe operation and IP66 integrity.
- Coil and secure cable - allowing for drip loops

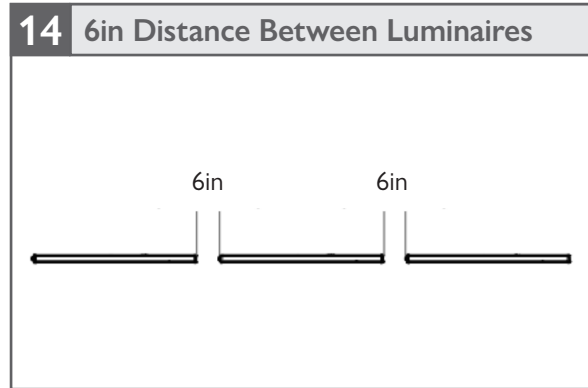


- When luminaires are mounted consecutively, the distance between each luminaire must be a minimum of 6 inches

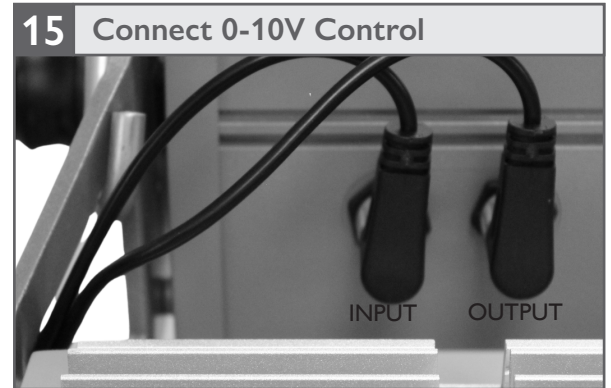

- If daisy-chaining 0-10V control, connect 1st luminaire in string to control system as previously described.
- Remove connector cap on female control output connector on luminaire and insert open end of right-angle male connector on 0-10V daisy-chain dimming cord (should click into place).

3 **ATTENTION:** Luminaires should only be installed by qualified individuals, and in accordance with national and local building and electrical codes. **3**

16 Coil and Secure Cables

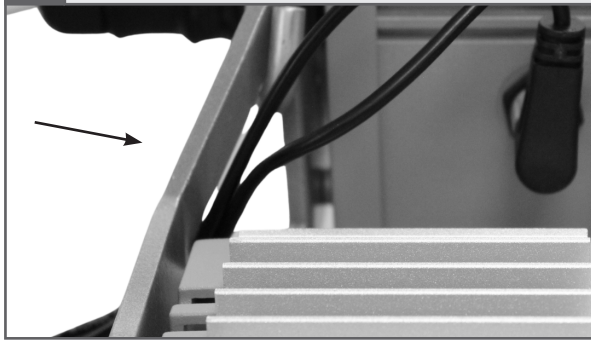

- Weave cord through open window of adjacent luminaire end plate and insert open end of right-angle female connector on opposite end of cord into male control input connector on luminaire.
- Coil and secure excess cable - allowing for drip loops to draw moisture away from connectors.

17 Finish Daisy-Chaining



- Continue until daisy-chain is complete.
- Ensure that connector cap remains firmly installed on 0-10V output connector of last luminaire in daisy chain string to ensure safe operation and IP66 integrity.

ATTENTION

- The TriPlane Linear dimming is a 0-10V sourcing supply (0.68mA/luminaire) that can be dimmed to off, however, for maximum energy savings P.L. Light Systems recommends using the control system to isolate the mains.
- Always ensure that cords are:
 - Coiled and excess cable secured - allowing for drip loops to draw moisture away from connectors.
 - Not concealed or extended through a wall, floor, ceiling, or other parts of the building structure
 - Not located above a suspended ceiling or dropped ceiling,
 - Not permanently affixed to the building structure
 - Not routed so that they are not subject to strain and are protected from physical damage
 - Visible over their entire length
 - Used within their rated ampacity as determined for the maximum temperature of the installed environment specified in the instructions

Refer to table below for maximum number of luminaires that can be daisy-chained per string, based on your voltage and luminaire output.

DAISY-CHAIN GUIDE		Max. Number of Luminaires / String	
		Luminaire Output	
		HO	LO
POWER	208V	3	6
	240V	4	7
	277V	4	8
	347V	5	10
	400V	6	12
	480V	6	12
DIMMING		25	25

PHOTOBIOLOGICAL RISK GROUP 2
CAUTION Possibly hazardous radiation emitted from this product.
 Do not stare at operating lamp. May be harmful to the eyes.

Product tested against IEC 62471

Photobiological risk is based on testing of the light output characteristic of a single luminaire. Increased exposure risk to facility personnel may be present, depending on number of luminaires and their placement and/or positioning within the facility. It is the responsibility of the facility management to address these risks at the facility level and to ensure that people entering the plant growth areas while the lights are on, are aware of these risks and that appropriate safeguards are in place.