





DELIVERING MAXIMUM SPACE AND YIELD EFFICIENCIES


The VertiMax is a high-output LED lighting solution that delivers optimal lighting performance in both single- and multi-tier lighting applications.

With a PAR output of 1800 μ mol/s and a system efficacy of 2.8 μ mol/J, the 640W luminaire offers exceptional performance and big energy savings. Designed to deliver light uniformly across the entire width and length of the grow rack, the VertiMax enables maximum space and yield efficiencies.

KEY FEATURES & BENEFITS INCLUDE:

- Broad spectrum optimized for full growth cycle in sole source applications
- Integrated driver for reduced installation time and expense
- Ultra low-profile design and low radiant heat output, lends itself ideally to vertical applications or in rooms with limited ceiling heights.
- Simple plug-and-play platform
- Delivers optimum light levels across the length and width of shelf—while minimizing light loss off the sides of the shelf.
- Dimmable for seamless integration with compatible control systems
- Daisy-Chainable

CALL 1.800.263.0213 TODAY AND ASK FOR A DETAILED LIGHT PLAN!

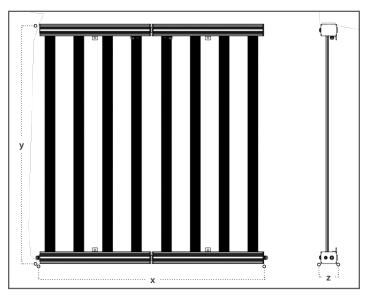


DIMENSIONS					
Length (x)	Width (y)	Height (z)	Weight		
45.05 in (1144 mm)	46.76 in (1187 mm)	3.07 in (78 mm)	120-277V	277-347V	
			27.56 lb. (12.5 kg)	33.07 lb. (15.0 kg)	







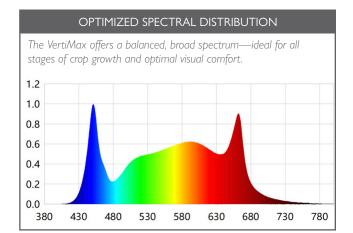

TECHNICAL SPECIFICATIONS†				
RATED MAIN VOLTAGE	120-277V	277-480V		
POWER	640W			
LIGHT SOURCE	LED			
SYSTEM EFFICACY	2.8 μmol/J			
FLUX	1800 μmol/s			
POWER FACTOR	>0.95			
INPUT FREQUENCY	50/60Hz			
DIMMING	I-10V			
LIFETIME	50,000 hrs			

[†]Accurate to ± 10% Maximum ambient operating temperature of 40°C



P.L. Light Systems develops and manufactures supplemental lighting systems for the horticultural industry.

