

HSE NXT-LP

600W / 1000 WATT LUMINAIRE



P.L. LIGHT SYSTEMS

THE LIGHTING KNOWLEDGE COMPANY



UNCOMPROMISING LIGHTING PERFORMANCE.

Engineered specifically for low ceiling applications, the HSE NXT-LP offers growers the same industry-leading performance they have come to expect from the NXT family of products — without compromise.


The fixture's ultra low-profile design lends itself ideally to close-to-ceiling mounting, to allow for more space between the fixture and the surface of the crop in facilities where ceiling height is limited.

KEY FEATURES & BENEFITS INCLUDE:

- Delivers optimum light output, unparalleled uniformity and depth penetration.
- Low-profile cast-aluminum housing for close-to-ceiling mounting — allowing for more space between light fixture and the surface of the crop.
- Dimmable electronic ballast.
- Built in heat fins and “breathable membrane” for optimal thermo-regulation.



EXCEPTIONAL DEPTH PENETRATION


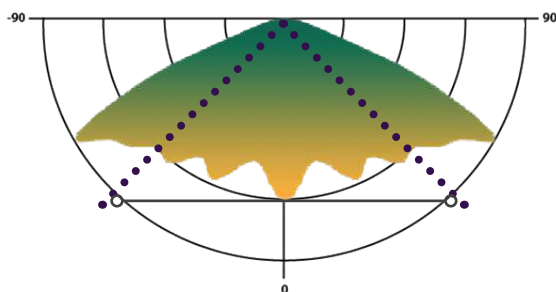


With taller plants, directing light deep within the canopy — to reach the lower leaves — is typically a challenge. For this reason, growers should be looking at both the light output and light distribution when selecting the best supplemental lighting for their application.

High peak candela values between 0 & 45 degrees in the lower hemisphere of the distribution curve indicate good depth penetration into the crop beneath the fixture.

The NXT-LP with Beta reflector, displays high values across this entire section of the curve to deliver uniformly deep light penetration into the canopy.

DIMENSIONS	
x = length	21.50 in. (54.61 cm)
y = width	11.00 in. (27.94 cm)
z = height	7.50 in. (19.05 cm)
weight	10.00 lb. (4.54 kg)

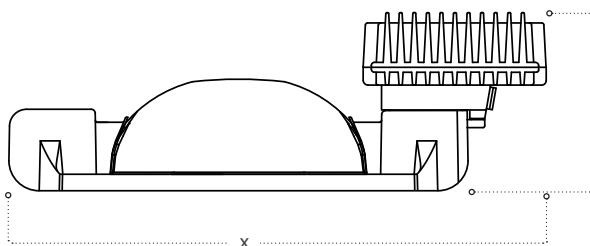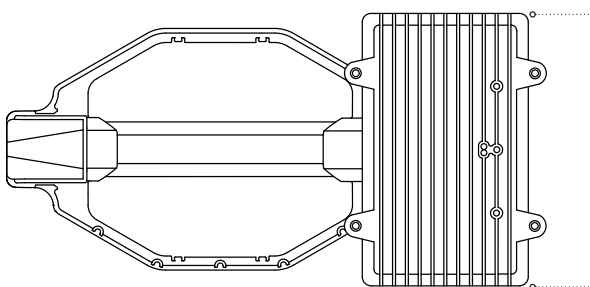

TECHNICAL SPECIFICATIONS*

	600W†		1000W			
RATED MAIN VOLTAGE	277V	347V	208V	240V	277V	347V
INPUT CURRENT	2.29A	1.84A	5.10A	4.42A	3.77A	3.01A
POWER FACTOR	>0.98		>0.98			
INPUT FREQUENCY	50/60Hz		50/60Hz			
ACTUAL INPUT POWER	630W		1060W	1060W	1045W	1040W
LAMP TYPE	HPS 600W 400V ELECTRONIC		HPS 1000W 400V ELECTRONIC			

*Accurate to $\pm 10\%$ †600W version available for project orders only, MOQ restrictions apply NOTE: The use of any lamp, other than specified, will render luminaire warranty null and void



P.L. LIGHT SYSTEMS

P.L. Light Systems, 41 Brockley Drive, Hamilton, Ontario, Canada, L8E 3C3

T: 905.563.4133 E: info@pllight.com www.pllight.com